

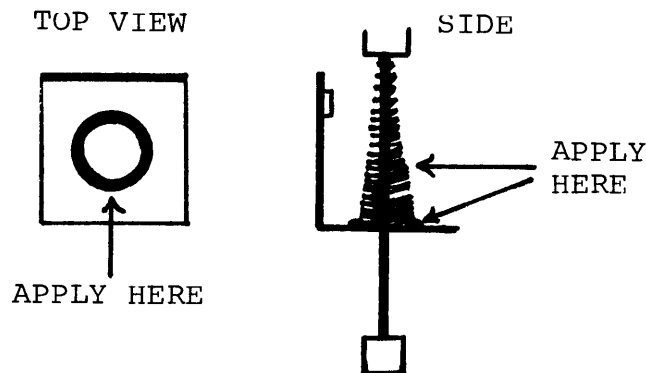
 SERVICE BULLETIN	model number	P-200	bulletin number	00013
	for serial numbers	ALL		
	subject	VORSETZER KEY SOLENOID SPRINGS		
	technical services approval			write
engineering approval			date	5/8/79

Since the model P-200 is external to the piano, it is to be expected that some mechanical noise may occur and the system may not perform as quietly as a system installed in an upright piano in which the solenoids are covered by the lower frame or in a grand piano where they are covered by a wooden box under the piano. If you have a problem involving a slight scraping noise from the key solenoids, a considerable amount of noise reduction can be accomplished by applying a liberal amount of LUBRIPLATE to the key solenoid "L" brackets where the bottoms of the springs touch, and to the springs themselves. LUBRIPLATE can be applied with a "Q" tip swab being careful not to apply it to the solenoid core or shaft itself. LUBRIPLATE or a similar lubricant can be obtained at an electronics supply house or auto parts store. LUBRIPLATE is manufactured by FISKE BROS. REFINING CO., NEWARK, NEW JERSEY.



A Division Of
SUPERSCOPE.
 INC.